

«

»

48-60/24

5296-005-50695541-10

2012

1.

48-60/24

(

).

2.

2.1.

.1

2.2.

1.

1

/			
1	(U . . .).	48	36 í 72
2	(U . . .)	24	23,52 í 24,48
3	, (I . .)	6,25	-----
4	(U . . .) , (I . .),	3,6	-----
5), I . I . , 20 (150	-----
6	,	-----	± 0,5 %.
7	0,1dB . I .	-----	± 0,5 %.
8		-----	(1,05 ÷ 1,7)dB .
9	,	1,4dB .	-----
10	()	+ 95°	± 9°
11	,	-----	± 0,02 % / °

2.3.

!!!

2.4.

(. .)

2.5.

(

6 20

6 5

6 1

2.6.

	+5 +40°	+5 +55°	40 +55°
,	80%, +25°	80%, +25°	98%, +25°
	450-800 . . .	450-800 . .	450-800 . .

2.7. , ;
 - 50000 ;
 - 1 ;
 - 20 .

-	-		
1	2	24	
		24	
2	3	24	
		24	
4	5	60-48	
		60-48	
5	6	60-48	
		60-48	

DB-9

-	
5,9	-24
1,2,3	+24

3.
 48-60/24 - 1 .

DB-9 ó 1 .

4. 4 5296-005-50695541-10.

5.

6.

6.1.


6.2.

6.3.


5

(, .).

Вид сверху

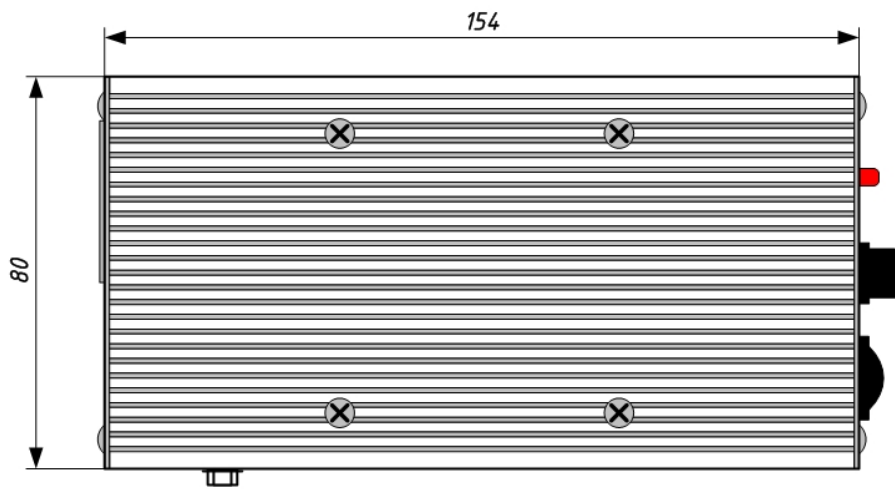

Вид сбоку

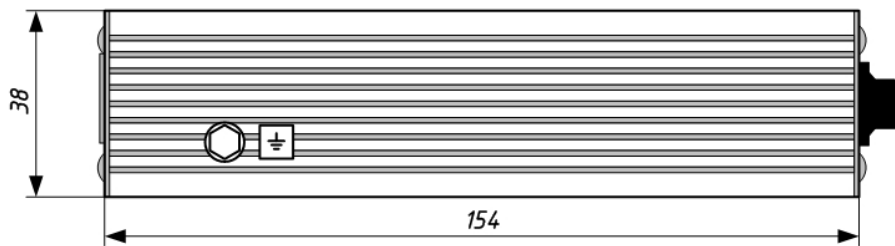

Вид сзади

Вид спереди

